


What You Will Need

- Standard Phillips Screwdriver
- Small Phillips Screw
- Needle Nose Pliers

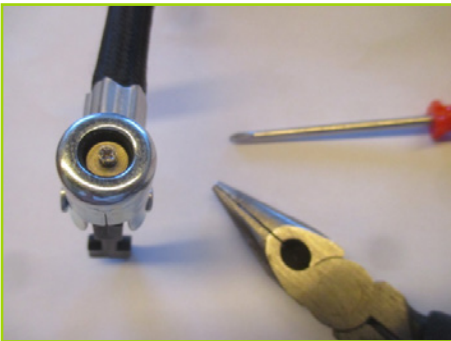

What You Can Do

1. Using the needle nose pliers, place the screw into the top of the lodged broken needle.
2. Use the screwdriver to secure the screw into the needle by either turning the screw clockwise or applying pressure to push the screw into the needle itself.



3. Using the needle nose pliers, pull the screw straight outward to remove the needle from where it is lodged.